

34




**COUPLINGS**

**SMALL FLEXIBLE COUPLINGS SIGERIST**


Advantages:- One piece construction eliminates play and backlash.  
 Suitable for speeds up to 15,000 R.P.M.  
 Great flexibility with minimum pressure on bearings.  
 High Torque - small dimensions.  
 Compensates all kinds of mis-alignment.

**For mis-alignment up to 0.4mm  
 Maximum angle 7°  
 Up to 1/2" (12.7mm) spindle dia.**

**BKN**

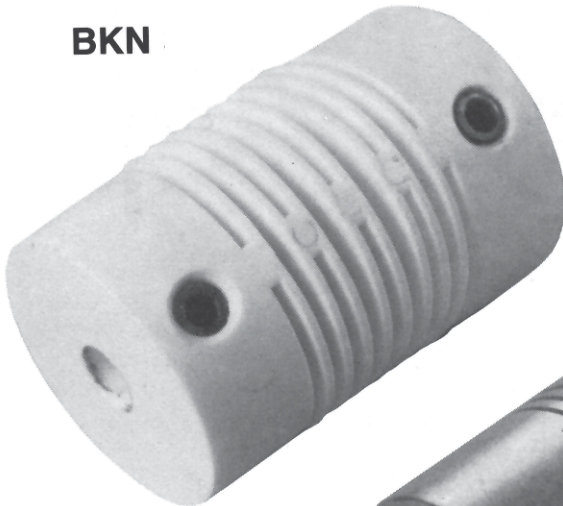

**BSZ**

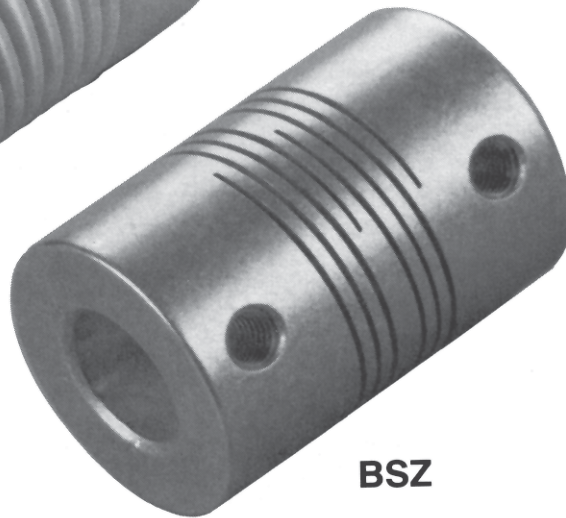

**BSZ SERIES - ALUMINIUM - BKN SERIES - HIGH STRENGTH PLASTIC**

PART NO.	OD	LENGTH	MIN. BORE1	MIN. BORE 2	MAX BORE	MAX BORE DEPTH
BSZ 3	12.70	22.86	2.90	4.39	6.35	6.86
BSZ 4	19.05	26.00	4.40	5.80	10.00	6.86
BKN 3	12.70	22.86	2.90	4.39	6.35	6.86
BKN 5	25.40	38.10	5.90	7.50	12.70	11.68